Features

- Design for no dust accumulation;

- Integrated design for clean room application;

- Long working life.

Advantages

- Easy for installation and maintainance;

- Intelligent control: Cable, infrared, wireless;

- Network option;

- Durable LUX maintaining.

Parameters

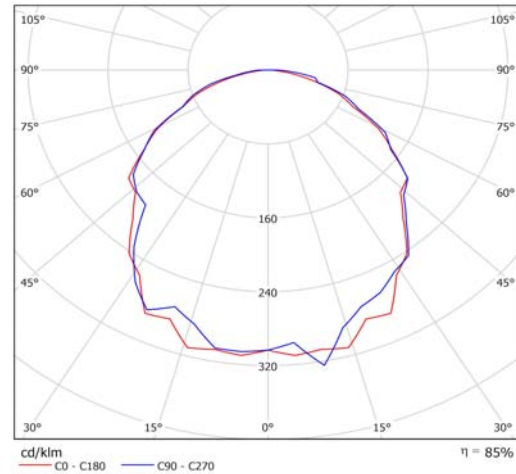|	Unit	Min	Typ	Max
Length	mm	1198	1200	1200
Width	mm	178	180	180
Height	mm		40	41
Input AC	V	90		240
Input DC	V	24		40
Power Range	W	30		80
Efficiency AC-CC	%		85%	
Efficiency DC-CC	%		96%	
Lum Lux	Lm/W		90	
Lum Lux effective	lm/W		76.5	

Applications

- Clean room of CLASS10/100/1000/10000 for semiconductor, precise assembly, warehouse, pharmaceutics, pharmaceutics, beverage etc;

- Super-class hotel, shopping-mall, meeting room, office building;

- House lighting;

- Clean surgery room and VIP ICU.

Accessories/Fixtures choice [extra charge]

- Fixtures for direct installation;

- Fixtures for suspending installation;

- One set of lockers/locking strip.

Light Distribution Curve

cd/klm   η = 85%
C0 - C180   C90 - C270

Certification

CE   (Under test for approval)

CCC (Under test for approval)

UL   (Under test for approval)

Product picture