


LED T-BAR燈配光曲線圖

量測序號:	2011-0224-185126								V	VPK+	
檢查日期:	23/02/11	開始時間:	下午 04:50:25	結束時間:	下午 06:46:26	量測項目:				109.91	155.6
儀器種類:	K-6485	識別名稱:	AMA	校正檔案:	123456	T1:	-	T3:	-	總流明:	2194.1400
序號:		量測點直徑(mm):	-	量測點數:	2701	T2:	-	T4:	-	最大光強度(cd):	927.07
預熱時間(分):	30	溫度:	24	溼度(%):	75				0度光束角(度):	95.51	
抽樣數:	1	量測人員:	AMA	檔案名稱:	2011-0224-185126.xls	檢測結果:	檢測完成		90度光束角(度):	95.41	

VPK-	THDV	I	IPK+	IPK-	IS	CFI	THDI	W	PF	VA	VAR	ENEG	FREQ
155.62	0.21	0.3634	0.46	0.46	0	1.2665	15.13	39.437	0.987	39.95	6.36	0	59.99
				Lb	H	R	T	A	P				
電源設定:	手動設定			127.32	2	2.67	0	210.25	4.6				
電流響應(nA/lx)	31.67		UGR		0	90							
量測距離(m):	7.22			53.16	16.77	16.68							
				-53.16	16.19	16.08							

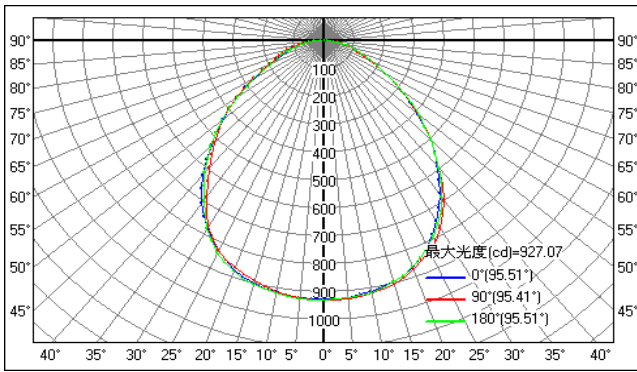

1 m	926 lx	220 cm	220 cm
2 m	232 lx	440 cm	441 cm
3 m	103 lx	660 cm	661 cm
4 m	58 lx	880 cm	881 cm
5 m	37 lx	1099 cm	1102 cm
6 m	26 lx	1319 cm	1322 cm
7 m	19 lx	1539 cm	1542 cm
8 m	14 lx	1759 cm	1763 cm
9 m	11 lx	1979 cm	1983 cm
10 m	9 lx	2199 cm	2203 cm

Vert. Spread: 95.4 deg. Horiz. Spread: 95.5 deg.

