

# SPOT LIGHT SERIES



Dimmable  Non-dimmable



## PAR38

Model No.	Colour Temperature (K)	Rendering Index (ra)	Beam Angle (°)	Max. Luminous Intensity (cd)	Lamp Life (hrs)	Wattage (W)	Voltage (V)	Frequency (Hz)	Power Factor	Diameter (mm)	Length (mm)	Weight (g)	Lamp Base
LR38-20W01	2700-6500	82	45°	1350	30,000	20	100-240	50/60	0.9	120	139	450	E27



Light intensity distribution curve

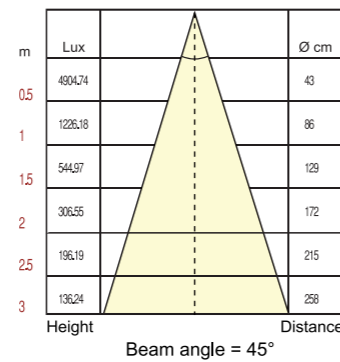

## AR111 WITH EXTERNAL DRIVER

Model No.	Colour Temperature (K)	Rendering Index (ra)	Beam Angle (°)	Max. Luminous Intensity (cd)	Lamp Life (hrs)	Wattage (W)	Voltage (V)	Frequency (Hz)	Power Factor	Diameter (mm)	Length (mm)	Weight (g)	Lamp Base
LR111-15W01	2700-6500	82	15°/20°/40°	7500	30,000	15	100-240	50/60	0.9	111	42	220	G53



Light intensity distribution curve

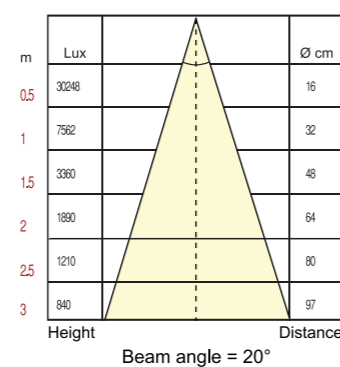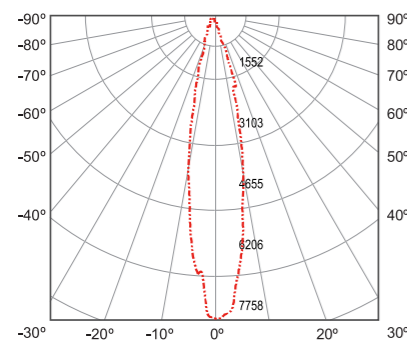

## MR16/GU10

Model No.	Colour Temperature (K)	Rendering Index (ra)	Luminous Flux (lm)	Efficiency (lm/W)	Beam Angle (°)	Max. Luminous Intensity (cd)	Lamp Life (hrs)	Wattage (W)	Voltage (V)	Frequency (Hz)	Power Factor	Diameter (mm)	Length (mm)	Weight (g)	Lamp Base
LR16-06W03	2700-6500	83	300/330	50/55	30°/40°	800/490	30,000	6	100-240	50/60	>0.5	50	55	45	GU10/GU5.3
LR16-06W05	2700-6500	83	300/330	50/55	30°/40°	800/490	30,000	6	ACDC 12V	-	-	50	38.5	40	GU5.3

Light intensity distribution curve

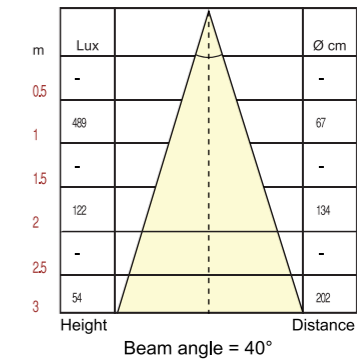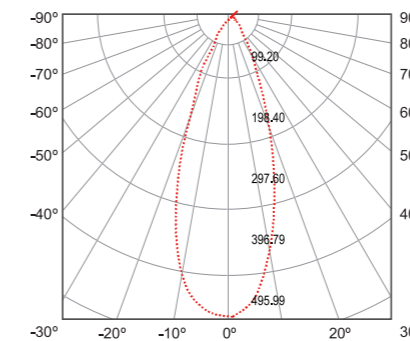

## MR16/GU10

Model No.	Colour Temperature (K)	Rendering Index (ra)	Luminous Flux (lm)	Efficiency (lm/W)	Beam Angle (°)	Max. Luminous Intensity (cd)	Lamp Life (hrs)	Wattage (W)	Voltage (V)	Frequency (Hz)	Power Factor	Diameter (mm)	Length (mm)	Weight (g)	Lamp Base
LR16-04W01	2700-6500	80	260	65	25°	750	30,000	4	100-240	50/60	>0.5	50	53	50	GU10/GU5.3
LR16-04W02	2700-6500	80	260	65	25°	750	30,000	4	ACDC 12V	-	-	50	53	50	GU5.3
LR16-05W01	2700-6500	80	350	70	45°/60°	400	30,000	5	100-240	50/60	>0.5	50	53	50	GU10/GU5.3
LR16-05W02	2700-6500	80	350	70	45°/60°	400	30,000	5	ACDC 12V	-	-	50	53	50	GU5.3

Light intensity distribution curve

