

35W LED Down/Spot Light(投嵌燈)



Specification 【規格表】	
Input Voltage (輸入電壓) :	100~240 VAC (50 /60Hz)
Watts (使用功率) :	35W
Power Factor (功率因素) :	>0.9
Color Temp. :	3000K / 4000K
Lumen (光通量) :	3000lm
Angle :	15° / 30° /120°
LED Type:	Cree XM-L2 * 6pcs
CRI :	>80
Dimension (尺寸) :	W162*H155mm
Cut-Outs (嵌入孔) :	∅ 150mm
Weight (重量) :	700g (Without Adaptor)

Applications



Commercial lighting, Spot light, Indoor lighting, Recessed 6" lighting...etc.

商場照明、重點區域照明、室內一般照明及當 15 公分嵌燈使用...

Ordering Code Guideline (編碼原則)

EX: DL35 – WW – W150 – 25

Down light 35W

3000K/4000K (NW)

Recessed 150mm


Beam Angle

Model List (型號)

Item	Model No. (品號)	Spec. (規格)
1-1	DL35-WW-W150-15	Down Light, 3000K, Cut-Outs (嵌入孔) 150mm, 15° (投射角)
1-2	DL35-NW-W150-15	Down Light, 4000K, Cut-Outs (嵌入孔) 150mm, 15° (投射角)
2-1	DL35-WW-W150-30	Down Light, 3000K, Cut-Outs (嵌入孔) 150mm, 30° (投射角)
2-2	DL35-NW-W150-30	Down Light, 4000K, Cut-Outs (嵌入孔) 150mm, 30° (投射角)

Mechanical Drawing (產品尺寸圖)

【Rotatable (可旋轉) 355°】


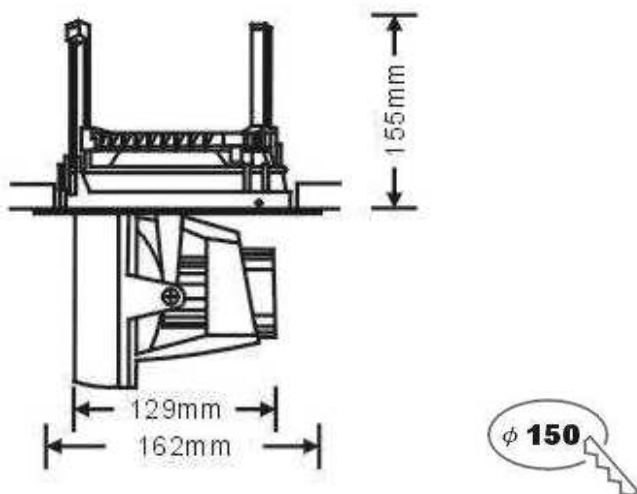


Environmental Condition (環境條件)

Item (項目)	Specification Description (規格說明)
Operating Temp (操作環境溫度)	0 ~ +50°C
Storage Temp (保存環境溫度)	-20 ~ +60°C
Humidity (環境相對濕度)	5% ~ 85%

Light Distribution Curve(配光曲線)

◆ Beam Angle : 15°

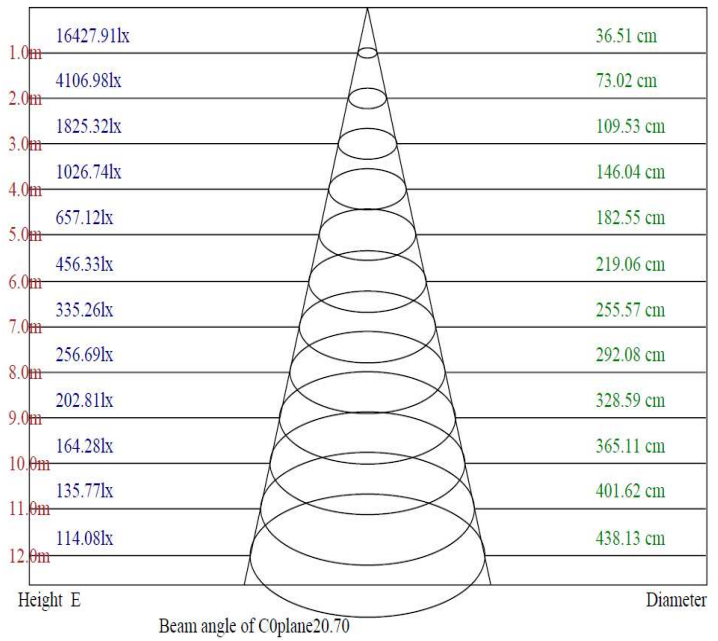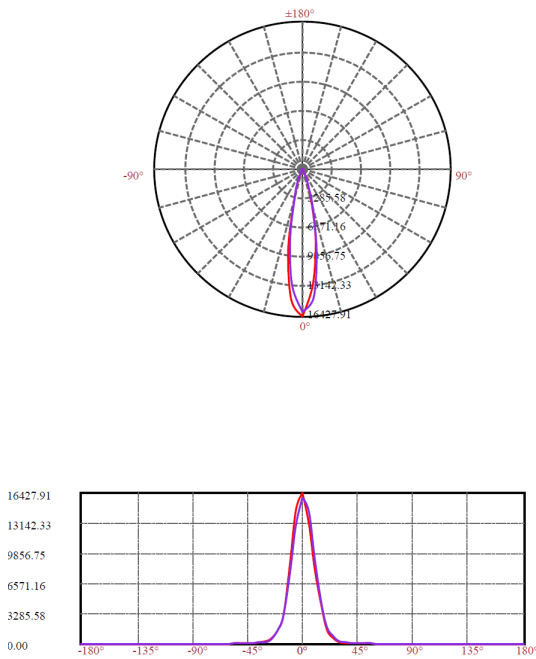

◆ Beam Angle : 30°

