

## COMETRAC



- Black
  - White
  - ◐ Black&White
- 1-circuit track adapter
- 3-circuit track adapter



### Cylinder adjustable angle track light with COB module and built-in driver

#### APPLICATIONS

- Retail
- Display areas
- Museums
- Offices


#### FEATURES

- Adopt genuine CREE COB module
- Patented optical reflector design, symmetric and round spectrum
- 1-circuit Juno, 2-circuit, 3-circuit Global track installation available, easy to retrofit
- Passive cooled heat sink
- 50% energy saving comparing to equivalent metal halide lamp
- Built-in constant current driver
- Lamp head swivels vertically in 270 degree
- Triac, PWM and DALi dimmer versions are customized


#### CONSTRUCTION

- Die-cast aluminum gearbox, lathe aluminum head, painted with white and black
- Spun and anodized high purity aluminum reflector
- Oxidized aluminum heat sink, anti-rust
- Polycarbonate track adapter, painted with white and black


#### DIMENSION (mm/inch)

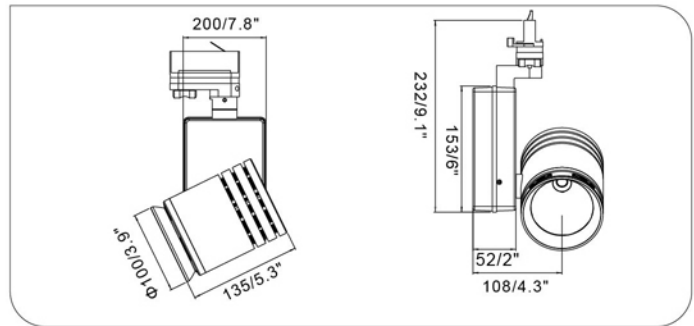

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



30W



30W



Model	Finish	Working Voltage	Working Current	LED Type	Power Consumption	CCT	CRI	Luminous Flux	Beam Angle
BVL031D/30W	WH/BK/ WH&BK	AC 85-265V	700 mA	CREE COB	30W	3000K/4000K/5000K	>80	2000-2250lm	12°/24°/38°
BVL031D/40W	WH/BK/ WH&BK	AC 85-265V	900 mA	CREE COB	40W	3000K/4000K/5000K	>80	2500-2700lm	12°/24°/38°
BVL031D/50W	WH/BK/ WH&BK	AC 85-265V	1050 mA	CREE COB	50W	3000K/4000K/5000K	>80	3200-3400lm	12°/24°/38°